


Dasar-dasar Pemrograman 1

Drs. Ahmad Rosadi, M. Kom

Apa itu ilmu Komputer?

- Ilmu Komputer
 - Ilmu teori dasar mengenai informasi dan komputasi serta implementasi dan aplikasinya dalam sistem komputer. -- Wikipedia
 - Bidang ilmu
 - Graphics, Computer Vision
 - Artificial Intelligence
 - Scientific Computing
 - Robotics
 - Databases, Data Mining
 - Computational Linguistics, Natural Language Processing ...
- Rekayasa Komputer
 - Irisan ilmu komputer dengan Teknik Elektro; kecuali hardware

Pasar Kerja Ilmu Komputer

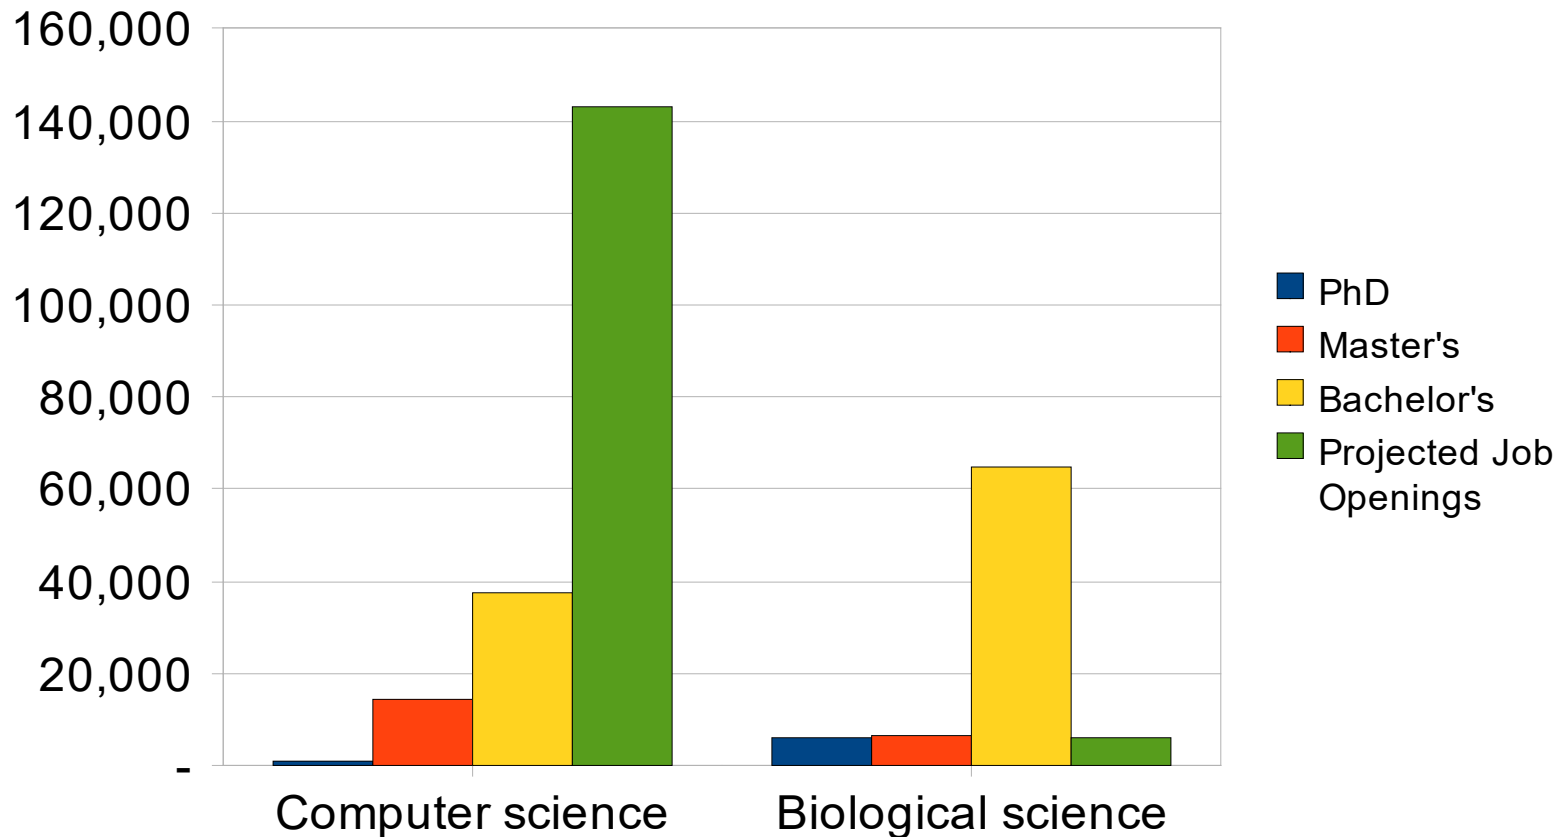

SOURCES: Tabulated by National Science Foundation/Division of Science Resources Statistics; data from Department of Education/National Center for Education Statistics: Integrated Postsecondary Education Data System Completions Survey; and NSF/SRS: Sur


Apa itu programming?

- **program**: Kumpulan instruksi yang akan dikerjakan dengan komputer.
- **eksekusi program** : kegiatan mengerjakan instruksi yang dimuat dalam program.
- **bahasa pemrograman** : sekumpulan aturan sistematis yang digunakan untuk menggambarkan komputasi dalam format tertentu yang dapat diedit oleh manusia.



Bahasa Pemrograman

- Beberapa bahasa yang berpengaruh
 - FORTRAN
 - science / engineering
 - COBOL
 - business data
 - LISP
 - logic dan AI
 - BASIC
 - bahasa yang sederhana

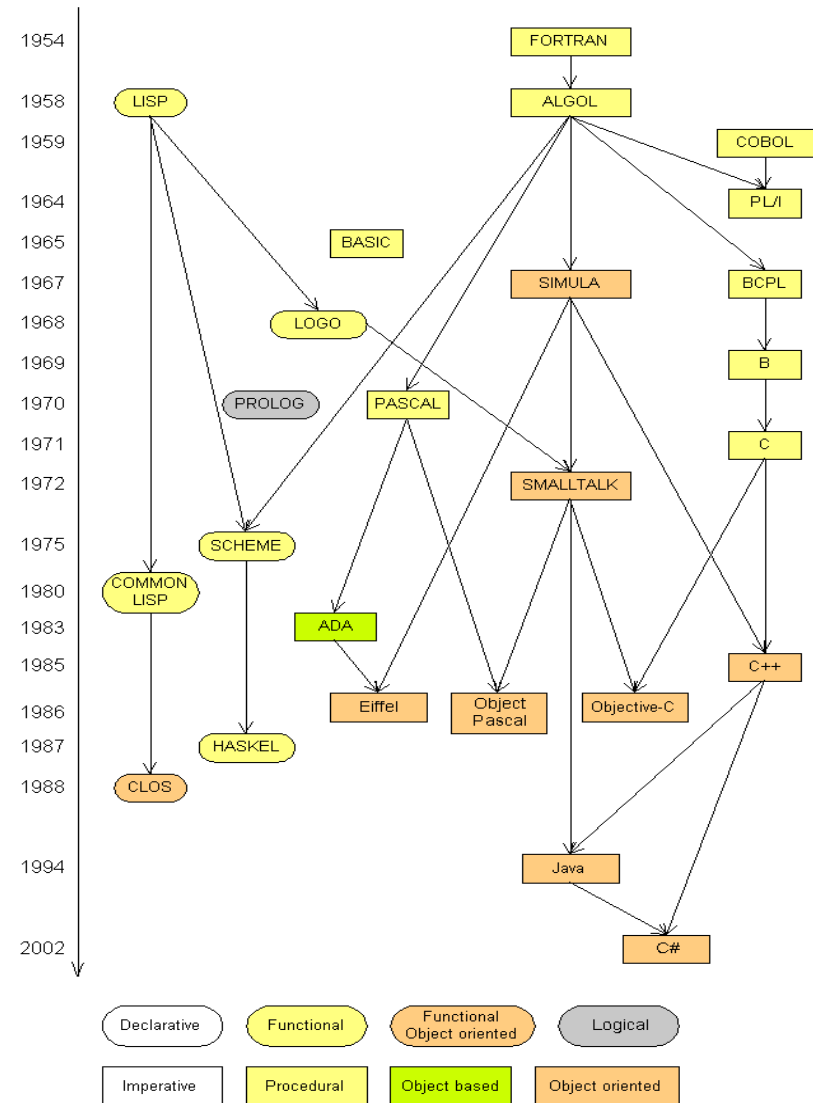

Beberapa bahasa modern

- *procedural languages*: program adalah serangkaian perintah
 - **Pascal** (1970): dirancang untuk edukasi
 - **C** (1972): low-level operating systems dan device drivers
- *functional programming*: fungsi-fungsi yang memetakan input ke output
 - **Lisp** (1958) / **Scheme** (1975), **ML** (1973), **Haskell** (1990)
- *object-oriented languages*: program menggunakan "objects" interaksi
 - **Smalltalk** (1980): bahasa object-oriented pertama
 - **C++** (1985): pengembangan "object-oriented" dari bahasa C
 - Sukses dalam industri; banyak digunakan untuk membangun OS seperti Windows
 - **Java** (1995): dirancang untuk embedded systems, web apps/servers
 - Jalan dibanyak platforms (Windows, Mac, Linux, cell phones...)

Dasar program Java

statement `println`

Compile/run sebuah program

1. *Tulis* program.


- **code atau source code:** kumpulan instruksi dalam sebuah program.

2. *Compile* program.

- **compile:** Translate program dari satu bahasa ke bahasa lainnya.
- **byte code:** compiler Java mengkonversi code kedalam format yang disebut *byte code* yang dapat berjalan di banyak tipe komputer.

3. *Run* (eksekusi) program.

- **output:** pesan yang ditampilkan kepada user oleh program.

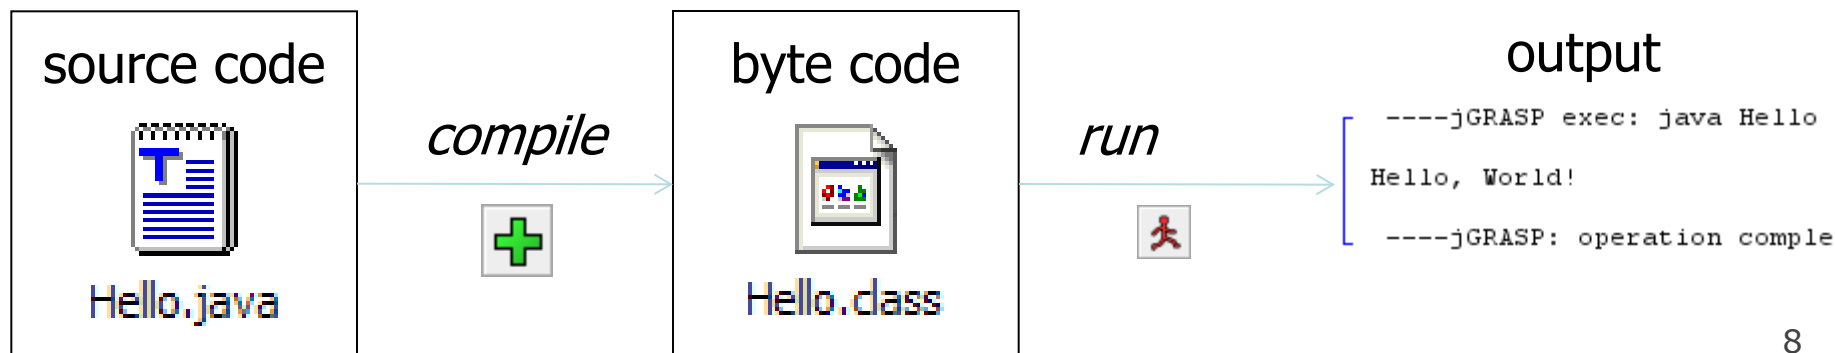

sebuah program Java


```
public class Hello {  
    public static void main(String[] args) {  
        System.out.println("Hello, world!");  
        System.out.println();  
        System.out.println("Program menghasilkan ");  
        System.out.println("empat baris output");  
    }  
}
```

- **Output-nya:**

Hello, world!

Program menghasilkan
empat baris output

- **console:** Text box kemana output program dicetak.

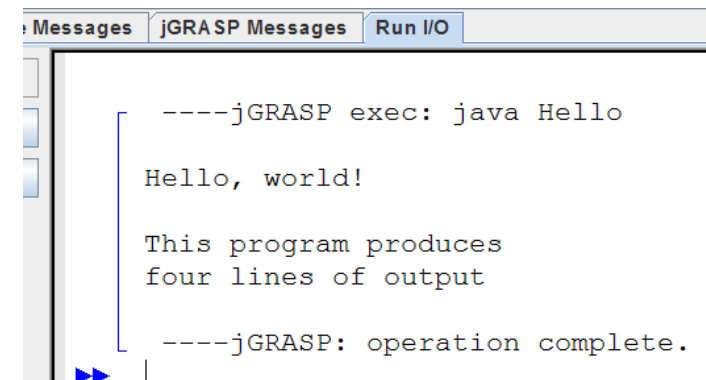

Struktur bahasa Java

```
public class name {  
    public static void main(String[] args) {  
        statement;  
        statement;  
        ...  
        statement;  
    }  
}
```

class: sebuah program

method: nama dari kelompok perintah

statement: perintah yang akan dieksekusi

- Setiap program bahasa Java yang executable memuat sebuah **class**,
 - yang memuat sebuah **method** dengan nama `main`,
 - yang memuat **statements** (perintah) yang akan dieksekusi.

System.out.println

- Sebuah statement yang mencetak sebaris output di console.
 - dilafalkan "print-linn"
 - kadang disebut "println statement" saja
- Dua cara untuk menggunakan `System.out.println` :
 - `System.out.println("text") ;`
Cetak pesan yang diberikan sebagai output.
 - `System.out.println() ;`
Cetak baris kosong sebagai output.

Nama dan identifiers

- Anda harus memberikan nama pada sebuah program.

```
public class GangstaRap {
```

- Konvensi pemberian nama : gunakan huruf kapital untuk setiap kata (contoh. `MyClassName`)
 - File program harus benar-benar sama (`GangstaRap.java`)
 - Termasuk huruf kapitalnya (Java dan C++ adalah "case-sensitive")
- **identifier**: A name given to an item in your program.
 - must start with a letter or `_` or `$`
 - subsequent characters can be any of those or a number

• **legal:** `_myName` `TheCure` `ANSWER_IS_42` `$bling$`

• **illegal:** `me+u` `49ers` `side-swipe` `Ph.D's`

Keywords

- **keyword:** An identifier that you cannot use because it already has a reserved meaning in Java.

abstract	default	if	private	this
boolean	do	implements	protected	throw
break	double	import	public	throws
byte	else	instanceof	return	transient
case	extends	int	short	try
catch	final	interface	static	void
char	finally	long	strictfp	volatile
class	float	native	super	while
const	for	new	switch	
continue	goto	package	synchronized	

Syntax

- **syntax:** The set of legal structures and commands that can be used in a particular language.
 - Every basic Java statement ends with a semicolon ;
 - The contents of a class or method occur between { and }
- **syntax error (compiler error):** A problem in the structure of a program that causes the compiler to fail.
 - Missing semicolon
 - Too many or too few { } braces
 - Illegal identifier for class name
 - Class and file names do not match
 - ...

Syntax error example

```
1 public class Hello {  
2     pooblic static void main(String[] args) {  
3         System.owt.println("Hello, world!")_  
4     }  
5 }
```

- Compiler output:

```
Hello.java:2: <identifier> expected  
    pooblic static void main(String[] args) {  
      ^
```

```
Hello.java:3: ';' expected  
    }  
    ^
```

```
2 errors
```

- The compiler shows the line number where it found the error.
- The error messages can be tough to understand!

Strings

- **string**: A sequence of characters to be printed.
 - Starts and ends with a " quote " character.
 - The quotes do not appear in the output.

- Examples:

```
"hello"
```

```
"This is a string.  It's very long!"
```

- Restrictions:

- May not span multiple lines.

```
"This is not  
a legal String."
```

- May not contain a " character.

```
"This is not a "legal" String either."
```


Escape sequences

- **escape sequence:** A special sequence of characters used to represent certain special characters in a string.

<code>\t</code>	tab character
<code>\n</code>	new line character
<code>\"</code>	quotation mark character
<code>\\</code>	backslash character

- **Example:**

```
System.out.println("\\hello\nhow\tare \"you\"?\\\\\");
```

- **Output:**

```
\hello
how      are "you"?\\
```

Questions

- What is the output of the following `println` statements?

```
System.out.println("\ta\tb\tc");  
System.out.println("\\\\");  
System.out.println("'");  
System.out.println("\"\"");  
System.out.println("C:\nin\the downward spiral");
```

- Write a `println` statement to produce this output:

```
/ \ // \\ /// \\\
```

Answers

- Output of each `println` statement:

```
          a          b          c
\\
'
""
C:
in          he downward spiral
```

- `println` statement to produce the line of output:

```
System.out.println("/  \\  //  \\\\  ///  \\\\\\\");
```

Questions

- What `println` statements will generate this output?

This program prints a
quote from the Gettysburg Address.

"Four score and seven years ago,
our 'fore fathers' brought forth on
this continent a new nation."

- What `println` statements will generate this output?

A "quoted" String is
'much' better if you learn
the rules of "escape sequences."

Also, "" represents an empty String.
Don't forget: use \" instead of " !
' is not the same as "

Answers

- `println` statements to generate the output:

```
System.out.println("This program prints a");  
System.out.println("quote from the Gettysburg Address.");  
System.out.println();  
System.out.println("\Four score and seven years ago,");  
System.out.println("our 'fore fathers' brought forth on");  
System.out.println("this continent a new nation.\");
```

- `println` statements to generate the output:

```
System.out.println("A \"quoted\" String is");  
System.out.println("'much' better if you learn");  
System.out.println("the rules of \"escape sequences.\");  
System.out.println();  
System.out.println("Also, \"\" represents an empty String.");  
System.out.println("Don't forget: use \"\" instead of \" !");  
System.out.println("' is not the same as \");
```

Comments

- **comment:** A note written in source code by the programmer to describe or clarify the code.
 - Comments are not executed when your program runs.
- Syntax:
 - // comment text, on one line**
 - or,
 - /* comment text; may span multiple lines */**
- Examples:
 - // This is a one-line comment.**
 - /* This is a very long
multi-line comment. */**

Using comments

- Where to place comments:
 - at the top of each file (a "comment header")
 - at the start of every method (seen later)
 - to explain complex pieces of code
- Comments are useful for:
 - Understanding larger, more complex programs.
 - Multiple programmers working together, who must understand each other's code.

Comments example

```
/* Suzy Student, CS 101, Fall 2019
   This program prints lyrics about ... something. */

public class BaWitDaBa {
    public static void main(String[] args) {
        // first verse
        System.out.println("Bawitdaba");
        System.out.println("da bang a dang diggy diggy");
        System.out.println();

        // second verse
        System.out.println("diggy said the boogy");
        System.out.println("said up jump the boogy");
    }
}
```


Static methods

Algorithms

- **algorithm:** A list of steps for solving a problem.
- Example algorithm: "Bake sugar cookies"
 - Mix the dry ingredients.
 - Cream the butter and sugar.
 - Beat in the eggs.
 - Stir in the dry ingredients.
 - Set the oven temperature.
 - Set the timer.
 - Place the cookies into the oven.
 - Allow the cookies to bake.
 - Spread frosting and sprinkles onto the cookies.
 - ...



Problems with algorithms

- *lack of structure*: Many tiny steps; tough to remember.
- *redundancy*: Consider making a double batch...
 - Mix the dry ingredients.
 - Cream the butter and sugar.
 - Beat in the eggs.
 - Stir in the dry ingredients.
 - Set the oven temperature.
 - Set the timer.
 - Place the first batch of cookies into the oven.
 - Allow the cookies to bake.
 - Set the timer.
 - Place the second batch of cookies into the oven.
 - Allow the cookies to bake.
 - Mix ingredients for frosting.
 - ...

Structured algorithms

- **structured algorithm:** Split into coherent tasks.

- 1** Make the cookie batter.

- Mix the dry ingredients.
 - Cream the butter and sugar.
 - Beat in the eggs.
 - Stir in the dry ingredients.

- 2** Bake the cookies.

- Set the oven temperature.
 - Set the timer.
 - Place the cookies into the oven.
 - Allow the cookies to bake.

- 3** Add frosting and sprinkles.

- Mix the ingredients for the frosting.
 - Spread frosting and sprinkles onto the cookies.

...

Removing redundancy

- A well-structured algorithm can describe repeated tasks with less redundancy.

1 Make the cookie batter.

- Mix the dry ingredients.
- ...

2a Bake the cookies (first batch).

- Set the oven temperature.
- Set the timer.
- ...

2b Bake the cookies (second batch).

3 Decorate the cookies.

- ...

A program with redundancy

```
public class BakeCookies {  
    public static void main(String[] args) {  
        System.out.println("Mix the dry ingredients.");  
        System.out.println("Cream the butter and sugar.");  
        System.out.println("Beat in the eggs.");  
        System.out.println("Stir in the dry ingredients.");  
        System.out.println("Set the oven temperature.");  
        System.out.println("Set the timer.");  
        System.out.println("Place a batch of cookies into the oven.");  
        System.out.println("Allow the cookies to bake.");  
        System.out.println("Set the oven temperature.");  
        System.out.println("Set the timer.");  
        System.out.println("Place a batch of cookies into the oven.");  
        System.out.println("Allow the cookies to bake.");  
        System.out.println("Mix ingredients for frosting.");  
        System.out.println("Spread frosting and sprinkles.");  
    }  
}
```


Static methods

- **static method:** A named group of statements.

- denotes the *structure* of a program
- eliminates *redundancy* by code reuse

- **procedural decomposition:**
dividing a problem into methods

- Writing a static method is like
adding a new command to Java.

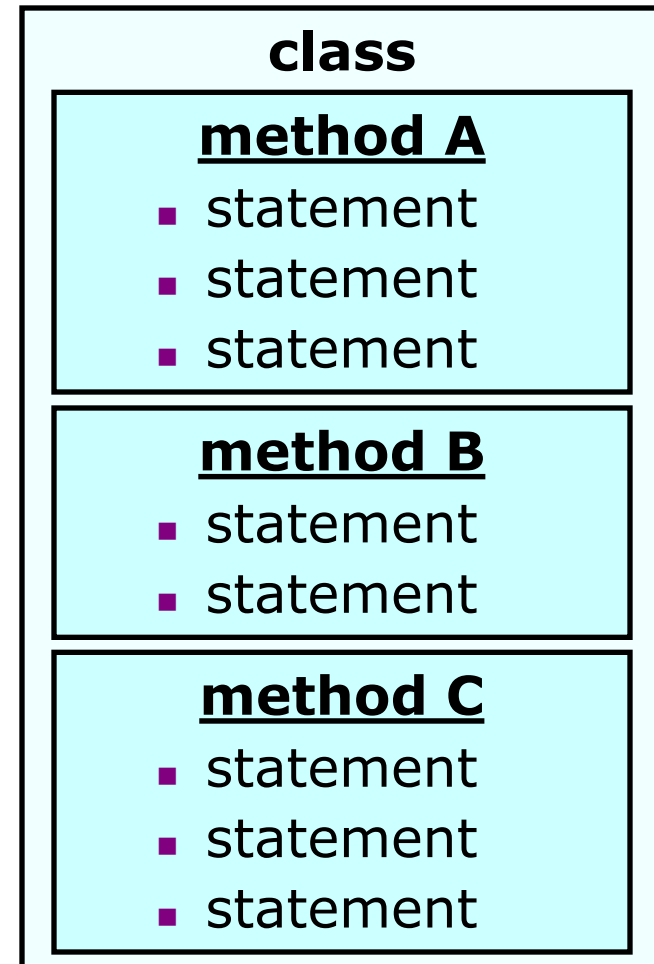

Using static methods

1. Design the algorithm.
 - Look at the structure, and which commands are repeated.
 - Decide what are the important overall tasks.
2. **Declare** (write down) the methods.
 - Arrange statements into groups and give each group a name.
3. **Call** (run) the methods.
 - The program's `main` method executes the other methods to perform the overall task.

Design of an algorithm

```
// This program displays a delicious recipe for baking cookies.
public class BakeCookies2 {
    public static void main(String[] args) {
        // Step 1: Make the cake batter.
        System.out.println("Mix the dry ingredients.");
        System.out.println("Cream the butter and sugar.");
        System.out.println("Beat in the eggs.");
        System.out.println("Stir in the dry ingredients.");

        // Step 2a: Bake cookies (first batch).
        System.out.println("Set the oven temperature.");
        System.out.println("Set the timer.");
        System.out.println("Place a batch of cookies into the oven.");
        System.out.println("Allow the cookies to bake.");

        // Step 2b: Bake cookies (second batch).
        System.out.println("Set the oven temperature.");
        System.out.println("Set the timer.");
        System.out.println("Place a batch of cookies into the oven.");
        System.out.println("Allow the cookies to bake.");

        // Step 3: Decorate the cookies.
        System.out.println("Mix ingredients for frosting.");
        System.out.println("Spread frosting and sprinkles.");
    }
}
```

Declaring a method

Gives your method a name so it can be executed

- Syntax:

```
public static void name() {  
    statement;  
    statement;  
    ...  
    statement;  
}
```

- Example:

```
public static void printWarning() {  
    System.out.println("This product causes cancer");  
    System.out.println("in lab rats and humans.");  
}
```

Calling a method

Executes the method's code

- Syntax:

name () ;

- You can call the same method many times if you like.

- Example:

```
printWarning ( ) ;
```

- Output:

```
This product causes cancer  
in lab rats and humans.
```

Program with static method

```
public class FreshPrince {  
    public static void main(String[] args) {  
        rap();                // Calling (running) the rap method  
        System.out.println();  
        rap();                // Calling the rap method again  
    }  
  
    // This method prints the lyrics to my favorite song.  
    public static void rap() {  
        System.out.println("Now this is the story all about how");  
        System.out.println("My life got flipped turned upside-down");  
    }  
}
```

Output:

```
Now this is the story all about how  
My life got flipped turned upside-down
```

```
Now this is the story all about how  
My life got flipped turned upside-down
```

Final cookie program

// This program displays a delicious recipe for baking cookies.

```
public class BakeCookies3 {  
    public static void main(String[] args) {  
        makeBatter();  
        bake();           // 1st batch  
        bake();           // 2nd batch  
        decorate();  
    }  
  
    // Step 1: Make the cake batter.  
    public static void makeBatter() {  
        System.out.println("Mix the dry ingredients.");  
        System.out.println("Cream the butter and sugar.");  
        System.out.println("Beat in the eggs.");  
        System.out.println("Stir in the dry ingredients.");  
    }  
  
    // Step 2: Bake a batch of cookies.  
    public static void bake() {  
        System.out.println("Set the oven temperature.");  
        System.out.println("Set the timer.");  
        System.out.println("Place a batch of cookies into the oven.");  
        System.out.println("Allow the cookies to bake.");  
    }  
  
    // Step 3: Decorate the cookies.  
    public static void decorate() {  
        System.out.println("Mix ingredients for frosting.");  
        System.out.println("Spread frosting and sprinkles.");  
    }  
}
```

Methods calling methods

```
public class MethodsExample {  
    public static void main(String[] args) {  
        message1();  
        message2();  
        System.out.println("Done with main.");  
    }  
  
    public static void message1() {  
        System.out.println("This is message1.");  
    }  
  
    public static void message2() {  
        System.out.println("This is message2.");  
        message1();  
        System.out.println("Done with message2.");  
    }  
}
```

- **Output:**

```
This is message1.  
This is message2.  
This is message1.  
Done with message2.  
Done with main.
```

Control flow

- When a method is called, the program's execution...
 - "jumps" into that method, executing its statements, then
 - "jumps" back to the point where the method was called.

```
public class MethodsExample {  
    public static void main(String[] args) {  
        message1 () ;  
  
        message2 () ;  
  
        System.out.println("Done with message1.");  
    }  
  
    ...  
}
```

```
public static void message1() {  
    System.out.println("This is message1.");  
}
```

```
public static void message2() {  
    System.out.println("This is message2.");  
    message1 () ;  
    System.out.println("Done with message2.");  
}
```

```
public static void message1() {  
    System.out.println("This is message1.");  
}
```




When to use methods

- Place statements into a static method if:
 - The statements are related structurally, and/or
 - The statements are repeated.
- You should not create static methods for:
 - An individual `println` statement.
 - Only blank lines. (Put blank `println`s in `main`.)
 - Unrelated or weakly related statements.
(Consider splitting them into two smaller methods.)




Drawing complex figures with static methods

Static methods question

- Write a program to print these figures using methods.



Development strategy






First version (unstructured):

- Create an empty program and `main` method.
- Copy the expected output into it, surrounding each line with `System.out.println` syntax.
- Run it to verify the output.

Program version 1

```
public class Figures1 {
    public static void main(String[] args) {
        System.out.println("      ");
        System.out.println(" /_____\\");
        System.out.println("/           \\");
        System.out.println("\\           /");
        System.out.println(" \\_____ /");
        System.out.println();
        System.out.println("\\           /");
        System.out.println(" \\_____ /");
        System.out.println("+-----+");
        System.out.println();
        System.out.println("      ");
        System.out.println(" /_____\\");
        System.out.println("/           \\");
        System.out.println("|   STOP   |");
        System.out.println("\\           /");
        System.out.println(" \\_____ /");
        System.out.println();
        System.out.println("      ");
        System.out.println(" /_____\\");
        System.out.println("/           \\");
        System.out.println("+-----+");
    }
}
```





Development strategy 2



Second version (structured, with redundancy):

- Identify the structure of the output.
- Divide the `main` method into static methods based on this structure.

Output structure



The structure of the output:

- initial "egg" figure
- second "teacup" figure
- third "stop sign" figure
- fourth "hat" figure

This structure can be represented by methods:

- `egg`
- `teaCup`
- `stopSign`
- `hat`

Program version 2

```
public class Figures2 {
    public static void main(String[] args) {
        egg();
        teaCup();
        stopSign();
        hat();
    }

    public static void egg() {
        System.out.println("          ");
        System.out.println(" /_____\\");
        System.out.println("/           \\");
        System.out.println("\\           /");
        System.out.println("\\_____ /");
        System.out.println();
    }

    public static void teaCup() {
        System.out.println("\\           /");
        System.out.println("\\_____ /");
        System.out.println("+-----+");
        System.out.println();
    }
    ...
}
```

Program version 2, cont'd.



...

```
public static void stopSign() {  
    System.out.println("      ");  
    System.out.println(" /_____\\");  
    System.out.println("/           \\");  
    System.out.println("|   STOP   |");  
    System.out.println("\\\\           /");  
    System.out.println(" \\\\_____ /");  
    System.out.println();  
}
```

```
public static void hat() {  
    System.out.println("      ");  
    System.out.println(" /_____\\");  
    System.out.println("/           \\");  
    System.out.println("+-----+");  
}
```

```
}
```






Development strategy 3

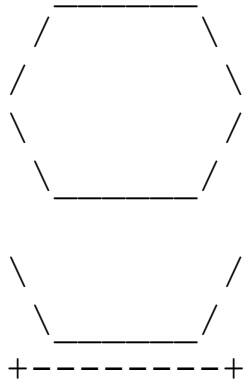

Third version (structured, without redundancy):

- Identify redundancy in the output, and create methods to eliminate as much as possible.
- Add comments to the program.

Output redundancy



The redundancy in the output:

- egg top: reused on stop sign, hat
- egg bottom: reused on teacup, stop sign
- divider line: used on teacup, hat

This redundancy can be fixed by methods:

- `eggTop`
- `eggBottom`
- `line`

Program version 3

```
// Suzy Student, CSE 138, Spring 2094
// Prints several figures, with methods for structure and redundancy.
public class Figures3 {
    public static void main(String[] args) {
        egg();
        teaCup();
        stopSign();
        hat();
    }

    // Draws the top half of an an egg figure.
    public static void eggTop() {
        System.out.println("      ");
        System.out.println(" /-----\\");
        System.out.println("/          \\");
    }

    // Draws the bottom half of an egg figure.
    public static void eggBottom() {
        System.out.println("\\          /");
        System.out.println("\\-----/");
    }

    // Draws a complete egg figure.
    public static void egg() {
        eggTop();
        eggBottom();
        System.out.println();
    }

    ...
}
```

Program version 3, cont'd.

```
...  
// Draws a teacup figure.  
public static void teaCup() {  
    eggBottom();  
    line();  
    System.out.println();  
}  
  
// Draws a stop sign figure.  
public static void stopSign() {  
    eggTop();  
    System.out.println("|  STOP  |");  
    eggBottom();  
    System.out.println();  
}  
  
// Draws a figure that looks sort of like a hat.  
public static void hat() {  
    eggTop();  
    line();  
}  
  
// Draws a line of dashes.  
public static void line() {  
    System.out.println("+-----+");  
}  
}
```